



## TECHNICAL NOTE

TNOT-1423

Date: 07-10-25

---

## EDGE 2 V5.0.1

---

### WHO SHOULD READ THIS DOCUMENT


*Sales representatives and dealers with access to the affected product*

### AFFECTED PRODUCTS

074-11876 Edge 2 Controller Screenless

074-11875 Edge 2 Main Controller

### New EDGE MPU Boards:

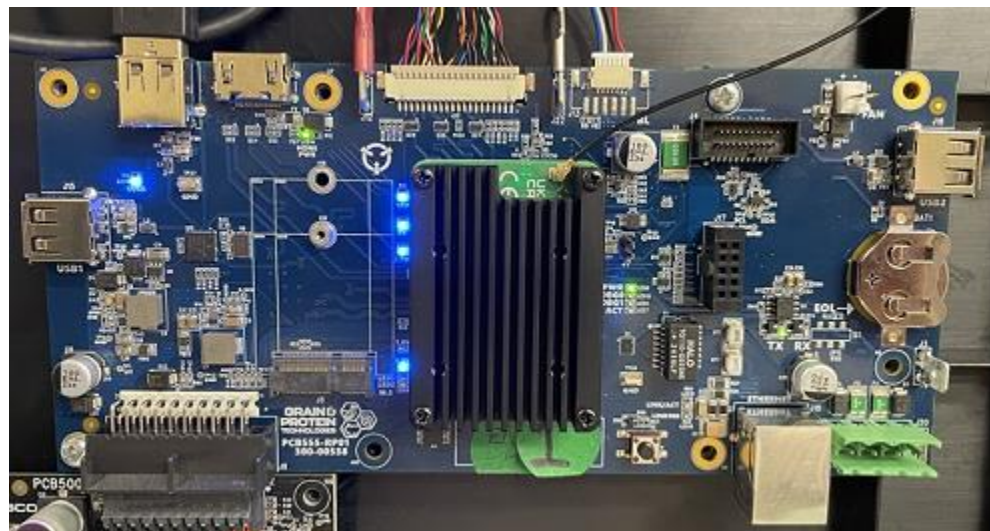

---

Please contact your District Manager if you require more information regarding this technical note or the Technical Support Service department (see contact information below):

- Technical Support: [mtl\\_techsupport@agcocorp.com](mailto:mtl_techsupport@agcocorp.com)

- 450-926-3164

SAV FORM-002

Page 1 of 2

## SCOPE

Software improvement/ New Features

## **DESCRIPTION OF NEW FEATURES/IMPROVEMENTS/FIXES**

-Revamped Relative Humidity page.

In the relative humidity page, it is now possible to see each probe's value even if no minimum ventilation compensation is used. Min/Max values, RH setpoint and RH alarms are also available. A button to see the minimum ventilation compensation page has been added.

- Enhanced water spill alarms. Now it supports two configurable time ranges per day.

- Fixed large ventilation grid not able to load when accessed remotely

- CO<sub>2</sub> Sensor Fix: Resolved inaccurate readings from the DOL-119 sensor. Note that for the sensor to work correctly, a conversion kit should be used.

## **Notes**

With Over-The-Air updates, customers will need to update to 4.6.1 first. Then, from 4.6.1 to 5.0.1, Over-The-Air update will be longer than usual, because of the new CPU board support.

Version 5.0.1 can be installed on older MPU boards as well.

Occasionally, the recovery update from 4.6.1 to 5.0.1 may fail because the USB stick is not detected. If this occurs, perform a power cycle. If you are using USB updates instead of the recovery update, the process will always work correctly