

# AGRI - ALERT

## ALARM SYSTEM



## Peace of MIND

Agri-Alert is a complete alarm system for monitoring temperature, power, feed and watering systems, burglary, bio-security and more. The Agri-Alert alarm system constantly monitors your operation and quickly notifies you upon the detection of common site problems or failures.

### AGRI - ALERT™ 800EZE

- Graphical LCD screen
  - View information quickly & clearly
  - Intuitive screen design
  - Easy navigation through menus
- Monitor up to 8 zones
- Acknowledge alarms by phone
- Call in from off site for zone temperature and system status report

AGRI - ALERT™  
128 TOUCH



AGRI - ALERT™ 800EZE

### AGRI - ALERT™ 128 TOUCH


- 7-inch color touch screen allows all zones to be seen at once
- Internet connectivity provides remote access, eliminating your need to go to the barn
- Email and SMS notifications
- Modular architecture allows you to design a system that's the right size for your operation
- 128 zones let you monitor a large site with a single system
- Phone dialer provides dependable delivery of alarm notification
- Built-in security makes sure only authorized users can adjust the system
- Fully compatible AA9600 replacement

### WIRELESS OPTION

Go wireless with RS-485 modules. This module can be programmed as a receiver or transmitter with a range of up to 6,500 feet\*. This wireless module is typically used in combination with a main controller (AA128 Touch, or AA9600). A secondary wireless RS-485 transmitter can be utilized to relay information from remote RS-485 modules to the wireless RS-485 (Base). This allows a variety of configuration options to accommodate your particular needs.

### TYPICAL SITE FOR AN AA128 SYSTEM

Wireless system allows establishing communication between up to 16 remote links per Wireless RS-485 (Base).

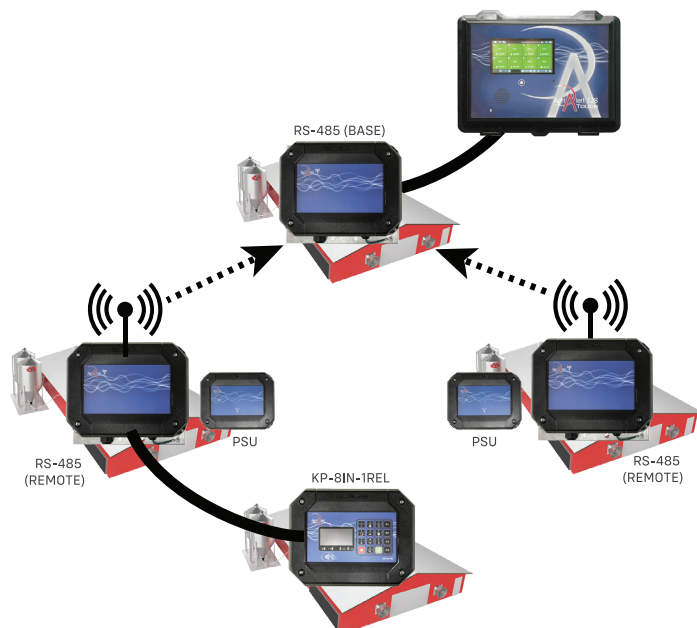

AGRI - ALERT SPECIFICATIONS	AA 800EZE	AA 128 TOUCH
Number of zones available	8	128
Programmable zone types	temperature dry contact / ELR, burglary	temperature dry contact / ELR, burglary, 4-20 mA, outdoor probe, 0-5 volt
Zone partitioning (grouping)	8	16
Temperature sensor calibration	yes	yes
Number of contacts system can call	8	12
Number of call sequences per alarm	up to 7	no limit
Acknowledge alarm by phone	yes	yes
Alarm restored call-back feature	yes	yes
Call in for temperature / status reports	yes	yes
Programmable recognition time per zone	yes	yes
Programmable start call delay	yes	yes
Programmable alarm recall feature	yes	yes
Outside temp compensation feature	yes	yes
Independent users	up to 10	up to 102
Auxiliary 28 volt / 12 volt DC power output	no/ yes	yes/ yes
Siren output	yes	yes
Output relays (programmable)	yes	yes
Individual zone labeling (on screen)	no	yes
Individual zone voice identification	yes	yes
Individual zone status identification	yes	yes
Remote modules	no	yes
Wireless compatible	no	yes
Rechargeable battery	yes	yes
Display	1" x 2" LCD screen	7" color touch screen
Event buffer (non-volatile)	yes	yes
Alarm memory log	yes	yes
Temperature SP can be set to a curve	no	yes
Telephone line monitoring	yes	yes
Phone line seizure	yes	yes
Bypass zones remotely	yes	yes
Program & Back-up w/PC	yes	yes
System self diagnostics feature (system trouble)	battery, AC supply, siren, fuses & probes	battery, AC supply, siren, fuses, probes & dialer, SBI
Multi language	no	yes
Automatic software update when connected to the internet	no	yes
Ethernet connection	no	yes

Specifications subject to change without notice.

**Grain & Protein Technologies Asia Sdn. Bhd.**

[FKA AGCO GSI (Malaysia) Sdn. Bhd.] Reg. No. 199601020394 (392746-V)  
Plot 218, Jalan Perindustrian Bukit Minyak 6, Kawasan Perindustrian  
Bukit Minyak, 14100 Simpang Ampat, Penang, Malaysia.

Fax: +604 505 9879

Website: [www.grainandprotein.com](http://www.grainandprotein.com)

Email: [enquiry@gptapac.com](mailto:enquiry@gptapac.com)



Printed in Malaysia © 2024. All right reserved.  
AP and Cumberland reserves the right to change designs and  
specifications without notice.  
AC10 10/24