

IR HOPPER

SENSOR



Reliable feed delivery **INFRARED SENSING**



Proven Technology

Cumberland's IR Hopper Sensor uses the same technology as Cumberland's i-PLUS3 control pans to manage your feed system hopper levels in the house.

Simple Design

Easy installation and maintenance.

Flexible Installation

12" height adjustment and 360° rotation.

Programmable Timing


10 second to 180 minute time delay.

Versatility

Easy to move between flocks.

No Moving Parts

Water and dust tight electrical connection.

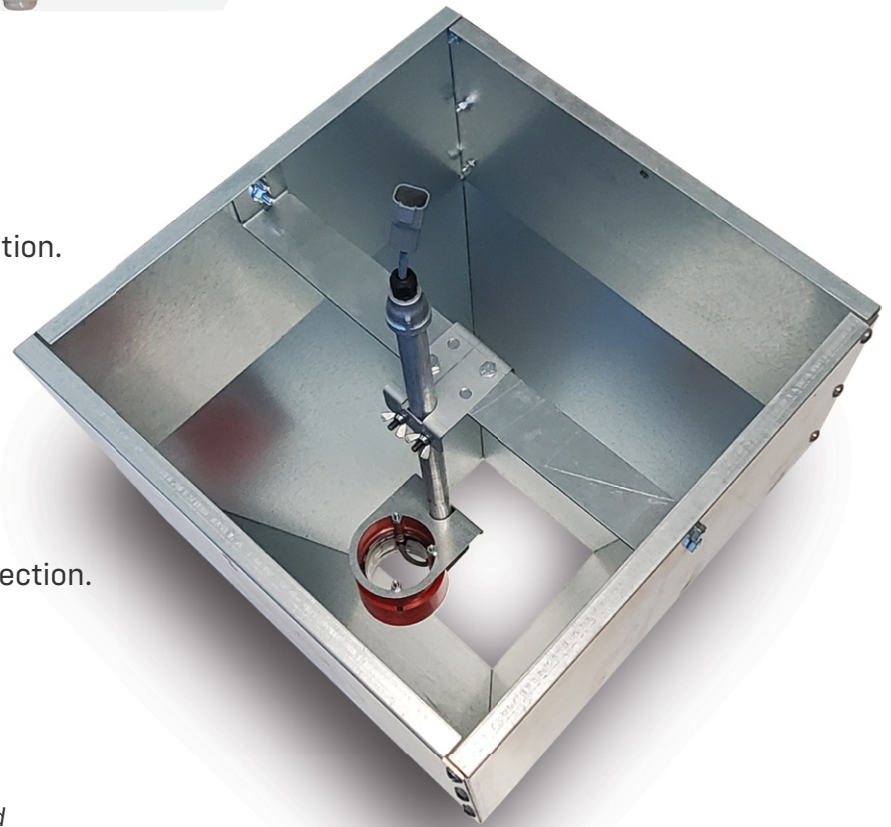

By adjusting the height and time delay, you can lessen cycle times, reduce feed outages, and the potential for overflow.



For more information, contact your Cumberland representative or visit cumberlandpoultry.com